

Reelcraft® 80000 Series Spring Driven Hose Reels

Hose & Tubing



see below for bumper stops, consult Dixon® for uses other than stated services

Features:

- reel inlet ¾" NPTF
- five-in-one heat treated aluminum casting incorporates main shaft, ratchet, spring arbor and inlet/outlet plumbing in one-piece casting
- furnished standard with PVC hose
- maximum temperature is **150°F (66°C)** with hose
- maximum temperature is **210°F (99°C)** without hose


with hose

Hose ID	Hose Length	Service	Working Pressure PSI	Part #
½"	75'	air / water	300	82075LP
	100'	air / water	300	82100LP
¾"	50'	air / water	250	83050LP

without hose

Hose Capacity	Service	PSI	Part #
50' of ¾" or 100' of ½"	air / water	500	83000LP

Adjustable Hose Bumper Stops

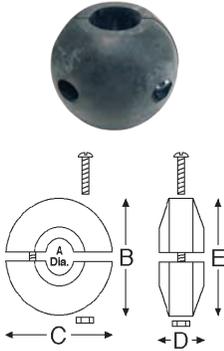

Hose ID	Hose OD		Dimensions		Reel Series Used On	Part #
	From:	To:	B,C,E	D		
¼"	.438"	.625"	2½"	1¼"	5000	1-HR1004A
⅜"	.625"	.749"	2½"	1¼"	5000	1-HR1004
⅜"	.625"	.749"	3"	1¼"	7000	1-HR1004-3
½" or ⅜" 2-wire	.750"	1.050"	3"	1¼"	7000	2-HR1004-3
¾"	1.060"	1.300"	3"	1¼"	7000	3-HR1004-3
½"	.750"	1.050"	3½"	2⅞"	9000	2-HR1005
¾"	1.060"	1.380"	3½"	2⅞"	9000	3-HR1005
1"	1.390"	1.550"	3½"	2⅞"	9000	4-HR1005

- not included on hose reels ordered without hose, must order separately

Reelcraft® 30,000 Manual Driven Hose Reels



Features:

- reel frame, spool and drum are fabricated from heavy gauge steel
- all bolted construction - no welds
- manual driven standard
- motor drive available
- ½" inlet

without hose

Hose ID	Hose Capacity	Spool Width	Working Pressure PSI	Part #
¾"	100'	12"	1000	C33112L
½"	200'	12"	3000	C32112M

Hand Crank Hose Reel



Features:

- working PSI: **3,000 PSI**
- maximum temperature: **160°F (71°C)**
- ⅜" outlet, ⅜" inlet
- includes jumper hose, mounting bracket and crank handle
- holds 100' of ⅜" pressure hose

Steel
Part #

AR-REEL100