Dixon® One-Piece Flange Adapters


Application:

- used in the transfer of water, brine, water-based chemicals, water-based acids, and gelatinous proppant (sand) slurry used at hydraulic fracturing sites
- use with HU200400RN two-piece nut

Features:

- flange x female or male hammer union straights (standard or short length)
- 45° elbows in female and male (flange x hammer union)
- no welds or pipe threads to deteriorate and cause premature leakage
- two-piece nut is pinned and bolted for perfect alignment
- all 4" Figure 206 threads are interchangeable with other reliable brands
- 125# flange match the bolt pattern of 150# flange
- iron adapters meet ASTM standards
- · forged steel nuts meet AISI standards

Flange Adapters - Straight

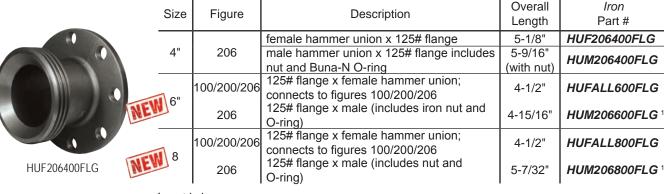

¹ nut is iron

Flange Adapters - Short



HUM206400FLG-ST

Size	Figure	Description	Overall Length	<i>Iron</i> Part #
4"	206	female hammer union x 125# flange short	3"	HUF206400FLG-ST
		male hammer union x 125# flange short includes nut and Buna-N O-ring	3-13/32"	HUM206400FLG-ST

Flange Adapters - 45° Elbow



HUM206400FLG-45

Size	Figure	Description	Overall Length	<i>Iron</i> Part #
4"	206	female hammer union x 125# flange 45° elbow	10-31/32"	HUF206400FLG-45
		male hammer union x 125# flange 45° elbow includes nut and Buna-N O-ring	12-1/32" (with nut)	HUM206400FLG-45



	O-ring
Size	<i>Buna-N</i> Part #
4"	O347BU

· For flange dimensions, diagrams and additional information please reference dixonvalve.com.

O =:--