


Watts Filters/Regulators

B11 Compact

Features:

- pressure range **2 - 125 PSIG** (.15 - 8.5 bar)
- temperature range: **40°F (4°C) to 120°F (49°C)**
- 40 micron filter
- 4 oz. bowl
- zinc body
- relieving type
- diaphragm operated
- spring adjustment mechanism
- glass-filled acetal plastic spring cage
- tamper resistant, snap lock, removable knobs
- uses a GC230 gauge (not supplied)

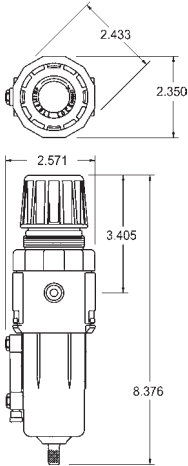

Size	Flow (SCFM)	Automatic Drain	Manual Drain
		Part #	Part #
1/4"	60	B11-02WJCR	B11-02WJC
3/8"	70	B11-03WJCR	B11-03WJC
1/2"	80	B11-04WJCR	B11-04WJC

SCFM ratings given at 100 PSIG inlet pressure.




Pneumatic
Accessories

Watts Regulators

R643 Miniature

Features:

- pressure range **2 - 125 PSIG** (.15 - 8.5 bar)
- inlet pressure: **300 PSIG** (20.4 bar) maximum
- temperature range: **40°F (4°C) to 120°F (49°C)**
- relieving type
- diaphragm operated
- non-rising adjusting knob
- 1/8" gauge port

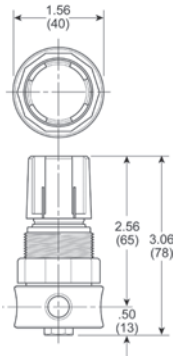

Size	Flow (SCFM)	Body Material	With Gauge	Without Gauge
			Part #	Part #
1/4"	10	brass	R364-02CG	R364-02C
		aluminum	R374-02CG	R374-02C

NEW

SCFM ratings given at 100 PSIG inlet pressure.



See pages 433 to 434 for accessories.

FRL's are designed for air service only, unless otherwise indicated.

SCFM ratings given at 100 PSIG inlet pressure.