



Norma/FGR Rep E Couplings

Applications


- Construction, water management, industrial pipelines, ship building
- Designed for the quick installation without service interruption

Sizes

- Pipe O.D. sizes 1.315"-48"

Features

- Axial nonrestraint
- Standard EPDM seal (NBR and FKM also available as specials)
- Joins pipes of same or dissimilar material; suitable for metal and plastic pipe connections
- Metal strip insert (only replaceable component)

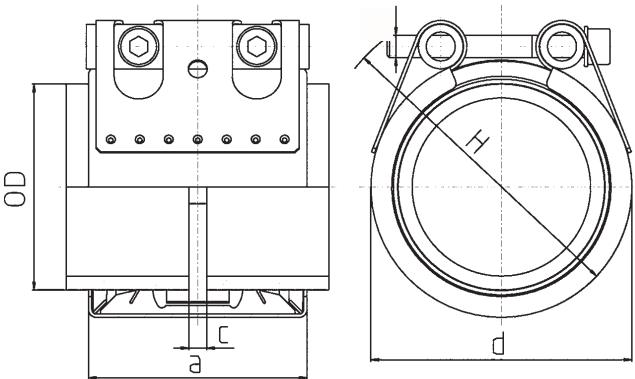

Size	Pipe O.D. Range		Working Pressure PSI	C max	Dimensions (approx.)			316 Ti Stainless Steel Part #
	Actual	Min to Max			A	D	H	
1-1/2"	1.89"	1.89" to 2.01"	725	0.314"	2.48"	2.755"	3.543"	05729360048
2"	2.36"	2.36" to 2.40"	580	0.669"	3.07"	3.346"	4.133"	05729360060
2-1/2"	2.87"	2.83" to 2.91"	580	0.984"	3.858"	3.74"	4.527"	05729360073
3"	3.50"	3.43" to 3.54"	508	0.984"	3.858"	4.33"	5.118"	05729360088
4"	4.49"	4.45" to 4.57"	508	0.984"	3.858"	5.314"	6.102"	05729360114
5"	5.59"	5.51" to 5.63"	464	1.377"	4.448"	6.692"	7.874"	05729360141
6"	6.61"	6.57" to 6.69"	464	1.377"	4.448"	7.677"	8.858"	05729360168

NOTE: Not pull-out resistant. Ensure that pipes are properly anchored and supported.



WARNING: Misuse of this product can cause serious injury or even death.



WARNING: Pressurized steam is an extremely dangerous commodity. Only hose, fittings, clamps, and accessory items that have been approved by Dixon for use with Dixon products for steam service should ever be used. Never use an unapproved item for steam service. Always follow the manufacturer's product recommendations for pressurized steam handling.