



Watts Filters

F602-Series Hi-Flow

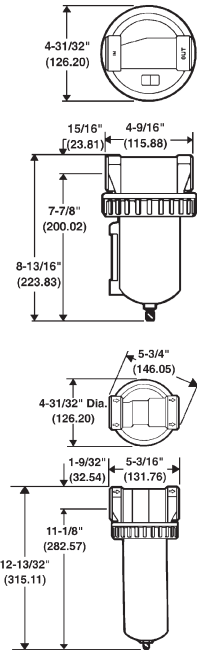

Features

- 40 micron polypropylene element

Specifications

- Automatic drain operating conditions:
  - temperature range: **40°F (4°C) to 120°F (49°C)**
  - maximum operating: 175 PSIG (12 bar)
- Manual drain operating conditions:
  - temperature range: **40°F (4°C) to 150°F (66°C)**
  - maximum operating: 250 PSIG (17 bar)

Zinc Body with Sight Glass and 16" Bowl

| Size   | Flow (SCFM) | Automatic Drain Part # | Manual Drain Part # |
|--------|-------------|------------------------|---------------------|
| 3/4"   | 270         | F602-06WJR             | F602-06WJ           |
| 1"     | 300         | F602-08WJR             | F602-08WJ           |
| 1-1/2" | 450         | F602-12WJR             | F602-12WJ           |

Aluminum Body with 26" Bowl

| Size | Flow (SCFM) | Automatic Drain Part # | Manual Drain Part # |
|------|-------------|------------------------|---------------------|
| 2"   | 1200        | F602-16WJR             | F602-16WJ           |

NOTE: See pages 343 - 344 for accessories.  
SCFM ratings given at 90 PSIG inlet pressure. ⚠  
FRLs are designed for air service only, unless otherwise indicated. Obsolete once stock is depleted.



F