


## Tube Process Hex Hangers


### Process Hex Hanger Weld Mount - B24V-PH

| Tube O.D. | Line O.D. (in) | H (in) | L (in) | W (in) | CL (in) | 304 Stainless Steel With Acorn Nut Part # | 304 Stainless Steel With Lock Nut Part # |
|-----------|----------------|--------|--------|--------|---------|-------------------------------------------|------------------------------------------|
| 1/2"      | 0.50           | 1.15   | 2.80   | 1.10   | 0.58    | B24-PH-G050                               | B24-PHL-G050                             |
| 3/4"      | 0.75           | 1.15   | 2.80   | 1.10   | 0.58    | B24-PH-G075                               | B24-PHL-G075                             |
| 1"        | 1.00           | 1.45   | 3.00   | 1.10   | 0.73    | B24-PH-G100                               | B24-PHL-G100                             |
| 1-1/2"    | 1.50           | 1.93   | 4.00   | 1.42   | 0.98    | B24-PH-G150                               | B24-PHL-G150                             |
| 2"        | 2.00           | 2.50   | 4.60   | 1.42   | 1.25    | B24-PH-G200                               | B24-PHL-G200                             |
| 2-1/2"    | 2.50           | 4.00   | 5.10   | 1.42   | 4.00    | B24-PH-G250                               | B24-PHL-G250                             |
| 3"        | 3.00           | 3.50   | 5.60   | 1.42   | 1.75    | B24-PH-G300                               | B24-PHL-G300                             |
| 4"        | 4.00           | 4.55   | 6.75   | 1.42   | 2.28    | B24-PH-G400                               | B24-PHL-G400                             |

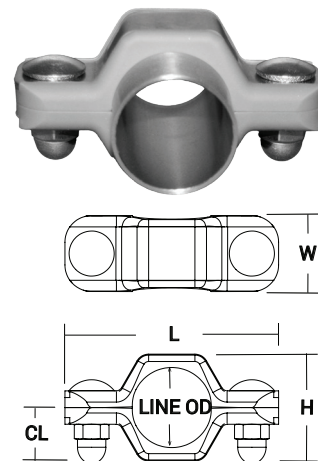

### Process Hex Hanger Weld Mount Threaded Coupling - B24V-PHC

| Tube O.D. | Line O.D. (in) | H (in) | L (in) | W (in) | Rod (stock length) |         | 304 Stainless Steel With Acorn Nut Part # | 304 Stainless Steel With Lock Nut Part # |
|-----------|----------------|--------|--------|--------|--------------------|---------|-------------------------------------------|------------------------------------------|
|           |                |        |        |        | Height (in)        | Thread  |                                           |                                          |
| 1/2"      | 0.50           | 1.15   | 2.80   | 1.10   | 0.47               | 3/8"-16 | B24-PHC-G050                              | B24-PHC-PHCL                             |
| 3/4"      | 0.75           | 1.15   | 2.80   | 1.10   | 0.47               | 3/8"-16 | B24-PHC-G075                              | B24-PHC-G075                             |
| 1"        | 1.00           | 1.45   | 3.00   | 1.10   | 0.47               | 3/8"-16 | B24-PHC-G100                              | B24-PHCL-G100                            |
| 1-1/2"    | 1.50           | 1.93   | 4.00   | 1.42   | 0.47               | 3/8"-16 | B24-PHC-G150                              | B24-PHCL-G150                            |
| 2"        | 2.00           | 2.50   | 4.60   | 1.42   | 0.59               | 1/2"-13 | B24-PHC-G200                              | B24-PHCL-G200                            |
| 2-1/2"    | 2.50           | 4.00   | 5.10   | 1.42   | 0.59               | 1/2"-13 | B24-PHC-G250                              | B24-PHCL-G250                            |
| 3"        | 3.00           | 3.50   | 5.60   | 1.42   | 0.59               | 1/2"-13 | B24-PHC-G300                              | B24-PHCL-G300                            |
| 4"        | 4.00           | 4.55   | 6.75   | 1.42   | 0.59               | 1/2"-13 | B24-PHC-G400                              | B24-PHCL-G400                            |

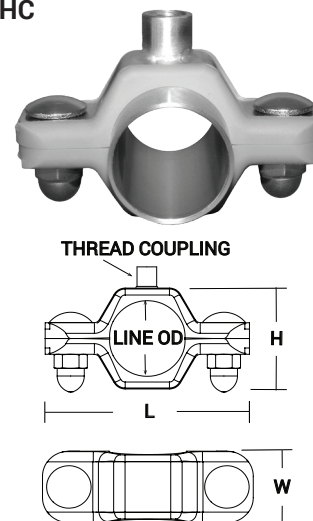

### Process Hex Hanger Weld Mount Rod Attached - B24V-PHR6

| Tube O.D. | Line O.D. (in) | H (in) | L (in) | W (in) | Rod (stock length) |           | 304 Stainless Steel With Acorn Nut Part # | 304 Stainless Steel With Lock Nut Part # |
|-----------|----------------|--------|--------|--------|--------------------|-----------|-------------------------------------------|------------------------------------------|
|           |                |        |        |        | Length (in)        | O.D. (in) |                                           |                                          |
| 1/2"      | 0.50           | 1.15   | 2.80   | 1.10   | 6                  | 0.38      | B24-PHR6-G050                             | B24-PHRL-PHR6L                           |
| 3/4"      | 0.75           | 1.15   | 2.80   | 1.10   | 6                  | 0.38      | B24-PHR6-G075                             | B24-PHRL-G075                            |
| 1"        | 1.00           | 1.45   | 3.00   | 1.10   | 6                  | 0.38      | B24-PHR6-G100                             | B24-PHR6L-G100                           |
| 1-1/2"    | 1.50           | 1.93   | 4.00   | 1.42   | 6                  | 0.38      | B24-PHR6-G150                             | B24-PHR6L-G150                           |
| 2"        | 2.00           | 2.50   | 4.60   | 1.42   | 6                  | 0.50      | B24-PHR6-G200                             | B24-PHR6L-G200                           |
| 2-1/2"    | 2.50           | 4.00   | 5.10   | 1.42   | 6                  | 0.50      | B24-PHR6-G250                             | B24-PHR6L-G250                           |
| 3"        | 3.00           | 3.50   | 5.60   | 1.42   | 6                  | 0.50      | B24-PHR6-G300                             | B24-PHR6L-G300                           |
| 4"        | 4.00           | 4.55   | 6.75   | 1.42   | 6                  | 0.63      | B24-PHR6-G400                             | B24-PHR6L-G400                           |

