

TVPC-Series Air & Vacuum Relief Tank Vent Valves

Features

- Dome helps prevent external contamination
- Can use any clamp gasket
- Clamps to 2" or 3" sanitary ferrule

Material

- 304 stainless steel PVC


Specifications

- Tank fill and evacuation rate: 250 GPM max
- Vacuum break: 0.1 PSI
- Pressure relief: 0.1 PSI



Size	304 Stainless Steel Part #
2" - 3"	TVPC200-300

Dimensions

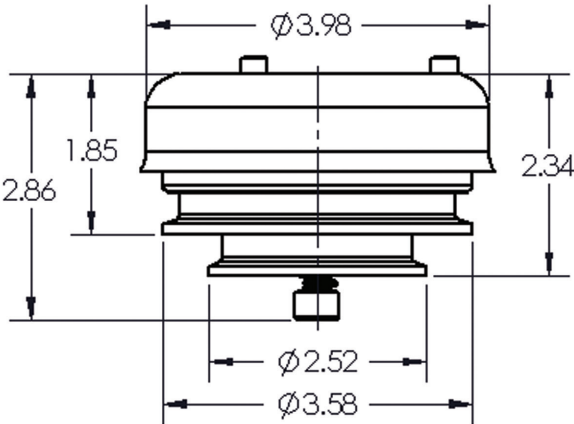

! NOTE: This valve has been designed as a secondary pressure and vacuum relief vent. Always open upper manhole whenever product is being transferred in excess of 250 gallons per minute. Dixon Sanitary assumes no liability for tank damage or product loss.

NOTE: All dimensions are approximate. Engineering dimensions are available upon request.
NOTE: Specifications are subject to change without notice.