


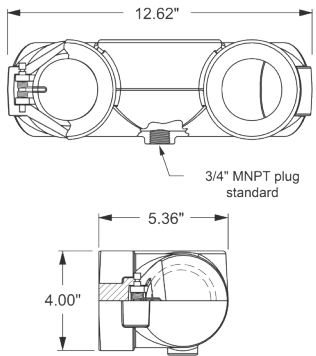

Reversible Concealed Angle Siamese Bodies

Features

- Fully reversible with a perpendicular trunnion allowing one body to be installed for top and bottom connections
- Bodies require wall plate WP2 see page 845

Specification

- Maximum operating pressure: 250 PSI at 70°F (21°C)

Approvals

- UL listed
- Approved by New York City Board of Standards and Appeals

| Outlet<br>Female NPT Thread | (2) Inlets<br>Female NPT Thread | Brass<br>Part # |
|-----------------------------|---------------------------------|-----------------|
| 4"                          | 2-1/2"                          | 4025REV90       |
|                             | 3"                              | 4030REV90       |

Reversible Concealed Angle Siamese Bodies

Features


- Fully reversible with a perpendicular trunnion allowing one body to be installed for top and bottom connections
- Replaces 23-391 bodies

Specification

- Maximum operating pressure: 250 PSI at 70°F (21°C)

| Outlet<br>Female NPT Thread | (2) Inlets<br>Female NPT Thread | Brass<br>Part # |
|-----------------------------|---------------------------------|-----------------|
| 5"                          | 2-1/2"                          | 90CREV5025      |
|                             | 3"                              | 90CREV5030      |
| 6"                          | 2-1/2"                          | 90CREV6025      |
|                             | 3"                              | 90CREV6030      |

Dimensions



| Size                 | A   | B      | C      |
|----------------------|-----|--------|--------|
| 5" x 3" x 3"         | 12" | 9-1/2" | 7-5/8" |
| 6" x 2-1/2" x 2-1/2" | 12" | 7-1/4" | 7-5/8" |
| 6" x 3" x 3"         | 12" | 9-1/2" | 7-5/8" |