

## Reelcraft® 80000 Series Spring Driven Hose Reels

### Features

- Reel inlet 3/4" NPTF
- Five-in-one heat-treated aluminum casting incorporates main shaft, ratchet, spring arbor, and inlet/outlet plumbing in one-piece casting
- Furnished standard with PVC hose

### Specifications

- Maximum temperature is 150°F (66°C) with hose
- Maximum temperature is 210°F (99°C) without hose

#### With Hose

Hose I.D.	Hose Length	Service	Working Pressure PSI	Part #
1/2"	75'	air / water	300	82075LP
	100'	air / water	300	82100LP
3/4"	50'	air / water	250	83050LP


#### Without Hose

Hose Capacity	Service	PSI	Part #
50' of 3/4" or 100' of 1/2"	air / water	500	83000LP

#### Adjustable Hose Bumper Stops


Hose I.D.	Hose O.D.		Dimensions		Reel Series Used On	Part #
	From:	To:	B,C,E	D		
1/4"	0.438"	0.625"	2-1/2"	1-1/4"	5000	1-HR1004A
3/8"	0.625"	0.749"	2-1/2"	1-1/4"	5000	1-HR1004
3/8"	0.625"	0.749"	3"	1-1/4"	7000	1-HR1004-3
1/2" or 3/8" 2-wire	0.750"	1.050"	3"	1-1/4"	7000	2-HR1004-3
3/4"	1.060"	1.300"	3"	1-1/4"	7000	3-HR1004-3
1/2"	0.750"	1.050"	3-1/2"	2-7/8"	9000	2-HR1005
3/4"	1.060"	1.380"	3-1/2"	2-7/8"	9000	3-HR1005
1"	1.390"	1.550"	3-1/2"	2-7/8"	9000	4-HR1005

NOTE: Not included on hose reels ordered without hose; must order separately

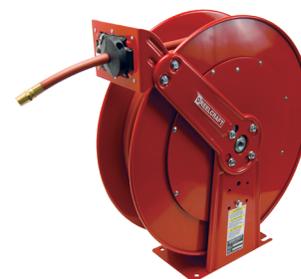

See below for bumper stops, consult Dixon® for uses other than stated services

F

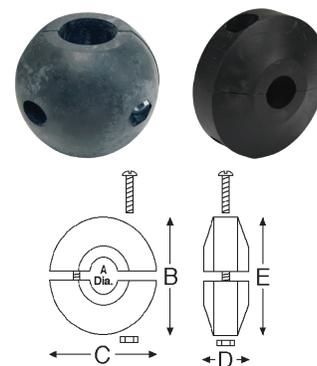

## Reelcraft® 30000 Manual Driven Hose Reels

### Features

- Reel frame, spool, and drum are fabricated from heavy gauge steel
- All bolted construction - no welds
- Manual-driven standard
- Motor drive available

#### Without hose

Hose I.D.	Inlet	Hose Capacity	Spool Width	Working Pressure PSI	Part #
3/4"	3/4"	100'	12"	1000	C33112L
1/2"	1/2"	200'	12"	3000	C32112M

