Dixon® Fire
Domestic Brass Industrial Fog Nozzles

The Right Connection®

Bumpered Fog Nozzle

BBN100

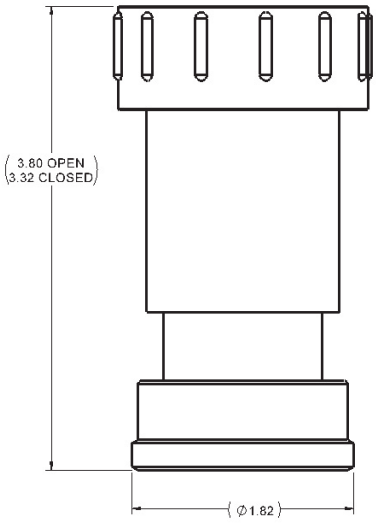

Specification

- Straight stream twist shut-off and flow-type change
- Capable of greater than 100° spray angle
- Cast and / or forged brass nozzle; maximum working pressure: **100 PSI**; maximum rated pressure: **175 PSI**
- UL Listed and Factory Mutual Approved for class A and B fires

Product Options

Nominal Size and layout

- ❑ 3/4”
- ❑ 1”

Inlet Thread

- ❑ GHT
- ❑ NPSH
- ❑ NST

Dixon Fire

325 Arbor Ct
Winchester, VA 22602
ph: 877.712.6179
fx: 800.283.4966
dixonvalve.com

© 2023 DVCC • BIFNFDC_823