Dixon® Fire Submittal Sheet

Adjustable Pressure Restricting Devices

The Right Connection®

Adjustable Pressure Restricting Devices

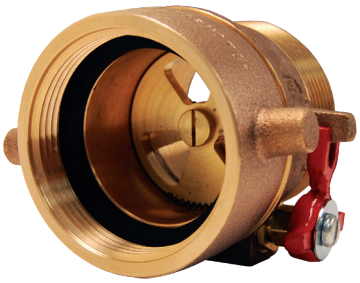

APRD250

Specifications

Straight - Female x Male

- Cast brass restricting device; female hose thread swivel x male thread outlet, **175 PSI**
- For installation on Class I or Class III standpipe system hose outlets
- All finished in rough brass and replacement parts available upon request.

Product Options

Nominal Size

- ❑ 1-1/2" (See note)
- ❑ 2-1/2"

Approvals Needed:

- ❑ UL
- ❑ ULC
- ❑ New York City
- ❑ None

Optional Caps/Plugs

- ❑ Pin lug
- ❑ Rocker lug

Inlet

- ❑ NST
- ❑ NYFD
- ❑ NYC
- ❑ NPSH
- ❑ Other_____

Outlet

- ❑ NST
- ❑ NYFD
- ❑ NYC
- ❑ NPSH
- ❑ Other_____

NOTE: 1-1/2" straight pressure restricting device is not approved by UL / ULC / New York

Dixon Fire

325 Arbor Ct
Winchester, VA 22602
ph: 877.712.6179
fx: 800.283.4966
dixonvalve.com

© 2023 DVCC • AVAPRFDC_823