TTMA Flanged Breakaway Extensions

TTMA Flange Extension with Groove (to be discontinued)



TETFG4AL

TTMA Breakaway Flange Extension

New

TETFB4AL-B

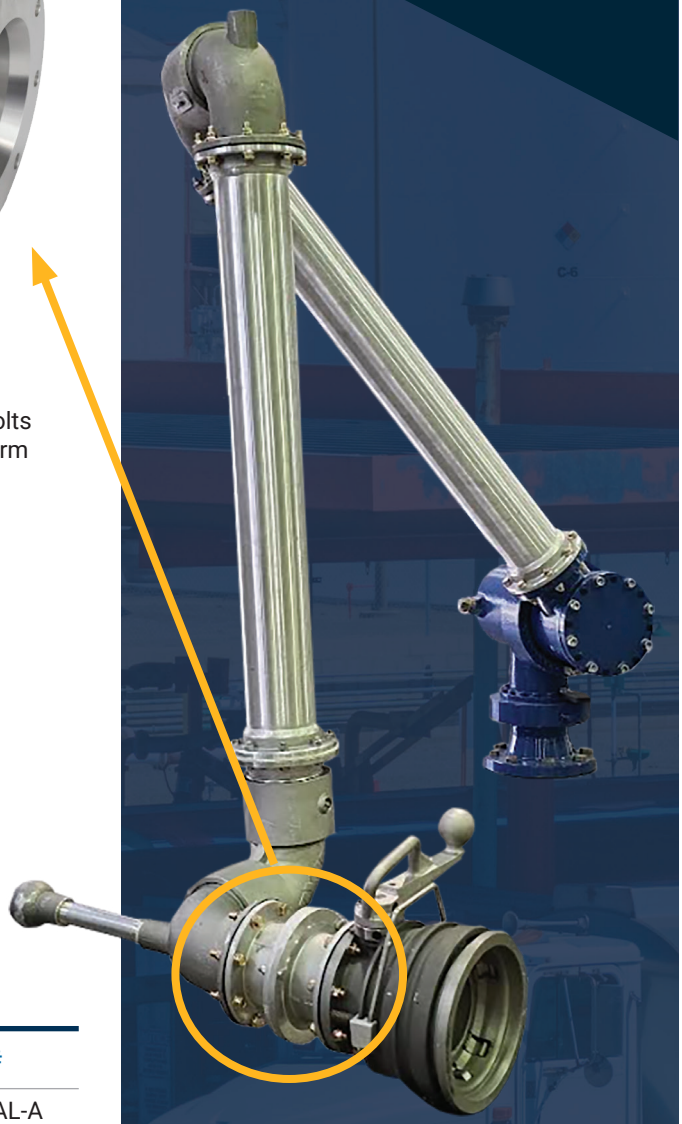

Application

- Creates an economical breakaway connection between the API loading coupler and the loading arm and increases the distance between the loading arm and tank truck by 6 inches for added clearance. Unlike the previous grooved flange design, this breakaway extension uses break bolts engineered to fail during a pull-away event, helping protect the loading arm and other connected equipment from excessive damage.

Size

- 4”

Features

- Adds 6" of clearance between the loading arm and tank truck
- Break bolts engineered to fail consistently during a pull-away event
- Tank truck flange connections
- Valveless design allows unobstructed product flow
- Compatible with Betts Wet-R-Dri valve/butterfly valve

Material

- Aluminum body
- Seals: FKM-A, FKM-B, Baylast™, Low Temp FKM and PTFE Encapsulated Silicone

Specification

- **150 PSI**

Description	Seal	Part #
TTMA flanged breakaway extension	FKM-A	TETFB4AL-A
TTMA flanged breakaway extension	FKM-B	TETFB4AL-B
TTMA flanged breakaway extension	Baylast	TETFB4AL-BL
TTMA flanged breakaway extension	Low Temp FKM	TETFB4AL-LVI
TTMA flanged breakaway extension	PTFE Encapsulated Silicone	TETFB4AL-TES
TTMA flange extension with groove	---	TETFG4AL

NOTE: TETFB4AL-A, TETFB4AL-LVI, TETFB4AL-TES, TETFB4AL-B, and TETFB4AL-BL will replace TETFG4AL once existing inventory is depleted. Visit dixonvalve.com to explore our full line of TTMA flanges, extensions, adapters, and safety breakaway fittings.

© 2026 DVCC • TBFE_426

Dixon Specialty Products

225 Talbot Blvd.
Chestertown, MD 21620
ph: 888.226.4673
fx: 410.778.1958
dixonvalve.com