



17-016 Drip Leg Automatic Drain


Application:

- Used in compressed air systems to automatically expel liquids from piping systems. Installed at low points in piping and at end of pipe network where water is likely to accumulate.

Features:

- metal bowl
- drain is ported to 1/8" NPT
- inlet pressure: **250 PSIG**
- maximum temperature: **175°F (79°C)**

Port Size	Part #
1/2"	17-016-107

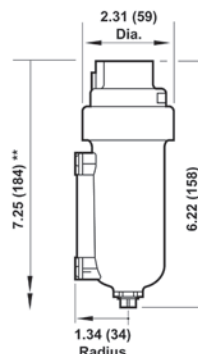

** Minimum clearance to remove bowl.

Filter Elements



5 micron element
5925-03

Used On	Description	Part #
F07	5 micron	3652-11
F08	5 micron 40 micron	3161-16 3161-18
F17	5 micron bronze 25 micron bronze 40 micron bronze	5311-01 5311-02 5311-03
F18	5 micron bronze 25 micron bronze 50 micron bronze	5882-11 5882-12 5882-13
F72	5 micron 40 micron	5925-03 5925-02
F73	5 micron 40 micron	4438-01 4438-03
F74	5 micron 40 micron	4338-04 4338-05

Filter Bowl / Bowl Guards



transparent bowl and guard
4325-51R

Used On	Description	Part #
F07	polycarbonate bowl with auto drain polycarbonate bowl with manual drain	3646-51 3646-53
F08	transparent bowl with manual drain	3776-50
F17	metal bowl with petcock drain	5390-77
F72	transparent bowl with manual drain transparent bowl with semi-automatic drain	4266-50RF 4266-52RF
F73	transparent bowl with manual drain, 1/4 turn transparent bowl with auto drain	4425-50RF 4425-51RF
F74	plastic bowl assembly with guard and 1/4 turn manual drain plastic bowl assembly with guard and automatic drain	4325-51R 4325-52R