

Watts Lubricators


General Features:

- general purpose use
- high performance over a very wide flow range

L606 Compact

Features:

- 2.6 oz. bowl
- zinc body
- micromist
- maximum operating conditions:
 - temperature range: **40°F (4°C) to 125°F (52°C)**
 - maximum operating pressure: **150 PSIG (10.2 bar)**

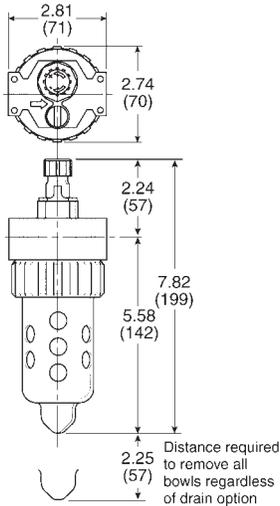

Size	Flow (SCFM)	Polycarbonate Bowl with Metal Bowl Guard Part #	Zinc Bowl Sight Glass with Twist Drain Part #
1/4"	40	L606-02B	L606-024B
3/8"	60	L606-03B	L606-034B
1/2"	90	L606-04B	L606-044B




Polycarbonate bowl with guard

SCFM ratings given at 90 PSIG inlet pressure.

L606 Standard

Features:

- 16 oz. bowl
- zinc body
- maximum operating conditions:
 - temperature range: **40°F (4°C) to 150°F (66°C)**
 - maximum operating pressure: **250 PSIG (17 bar)**
- 3/4", 1" and 1 1/2" are fillable while under pressure

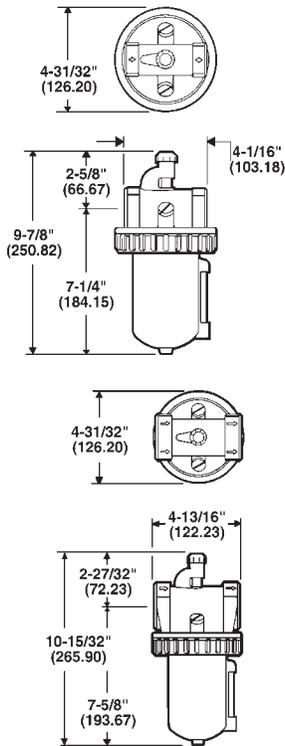

Size	Flow (SCFM)	Zinc Bowl with Sight Glass Part #
3/4"	325	L606-06W
1"	350	L606-08W
1 1/2"	400	L606-12W



L606-12W

See pages 433 to 434 for accessories.
See page 367 for air tool lubricant.

FRL's are designed for air service only, unless otherwise indicated.

SCFM ratings given at 90 PSIG inlet pressure.