

ULC UL Factory Set Pressure Reducing (regulating) Valves

Features:

- true combination shut-off and pressure reducing valves
- 1½" reduces inlet pressure of 300 PSI (2069 kPa) or less to working pressures of **10** through **175 PSI** (69-1207 kPa); 2½" reduces inlet pressures of 400 PSI (2758 kPa) or less to working pressures of **20** through **175 PSI** (138-1207 kPa) under discharge or static conditions
- female x female valves have an open / closed indicator bonnet for confirmation of valve status
- valves are tamper resistant and automatic
- available with a tamper proof switch
- complete switch, with bracket and housing, available for field mounting, consult Dixon™ for price and availability
- all debris must be flushed from the system prior to being placed into service 
- other configurations are available, contact Dixon™ for additional information

Specifications:

- pressure reducing (regulating) valves are listed by:
 1. Underwriters Laboratories for Automatic Sprinkler Systems as floor or zone control valves
 2. Standpipe Systems, Class I, II and III
 3. Automatic Check Valve for Dual Riser Systems
 4. Approved by New York City Board of Standards and Appeals, approval # MEA 54-07-E
 5. Approved by City of Los Angeles and the City of San Francisco (ULC 2½")




Inlet Female NPT	Outlet Male NST (NH)	Cast Brass Part #	Price/E
1½"	1½"	NAPRAV150F-15	\$720.00
		NAPRAV150F-20	720.00
		NAPRAV150F-25	720.00
		NAPRAV150F-30	720.00
		NAPRAV150F-35	720.00
2½"	2½"	NAPRAV250F-55	940.00
		NAPRAV250F-60	940.00
		NAPRAV250F-65	940.00
		NAPRAV250F-70	940.00
		NAPRAV250F-75	940.00
		NAPRAV250F-80	940.00
		NAPRAV250F-90	940.00



Inlet Female NPT	Outlet Female NPT	Cast Brass Part #	Price/E
1½"	1½"	NAPRAVF150-15	\$720.00
		NAPRAVF150-20	720.00
		NAPRAVF150-25	720.00
		NAPRAVF150-30	720.00
		NAPRAVF150-50	720.00
2½"	2½"	NAPRAVF250-55	940.00
		NAPRAVF250-60	940.00
		NAPRAVF250-65	940.00
		NAPRAVF250-70	940.00
		NAPRAVF250-75	940.00
		NAPRAVF250-80	940.00
		NAPRAVF250-85	940.00

Dimensions

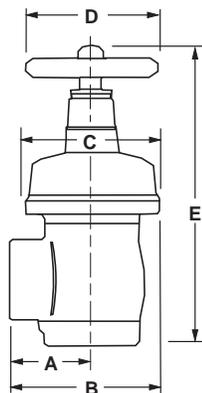

Size	A	B	C	D	E closed	E open
1½"	2-7/32"	4-5/32"	3-7/8"	3-3/4"	9-25/64"	8-53/64"
2½"	3-7/32"	6-3/32"	5-3/4"	5-3/4"	11-3/8"	10-13/16"