




Sanitary Digital Thermometers

Model Number Breakdown
DT-2U-BT-DF-10

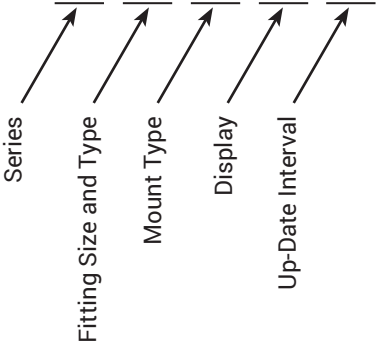

Sizes

- Dial size: 3-1/2" diameter
- LCD display: 0.6"

Materials

- Product contact: 316L stainless steel
- Case: 304 stainless steel
- Lens: 1/4" polycarbonate

Features

- Accuracy: $\pm 1^{\circ}$
- Surface finish: Ra max. is 8 microinches
- Battery size / life: standard AAA/3 years
- Shipping weight: approximately 3 lbs.

Specifications

- Temperature limits: -58°F to 302°F (-50°C to 150°C)
- Ambient operating limits: -4°F to 140°F (-20°C to 60°C)
- Resolution: 0.1° (-58° thru 199.9°)

Ordering Information

Series

DT Sanitary digital thermometer

Fitting Type¹

Sizes available: 75, 15, 2, 25, 3, and 4

- I male I-Line
- T #13H captive nut and #14 bevel seat
- U clamp

¹ Specify size then type, i.e. 1-1/2" = 15U

Mount type

- BT bottom
- RT right side
- LF left side
- TP top
- BK back
- BTR remote fitting

Display

- DF F (Fahrenheit) *standard*
- DC C (Celsius)

Up-Date Interval

- 1 one second (1 year battery life)
- 10 ten second (3 year battery life)



Dimensions


LEFT SIDE MOUNT




RIGHT SIDE MOUNT



BACK MOUNT



BOTTOM MOUNT

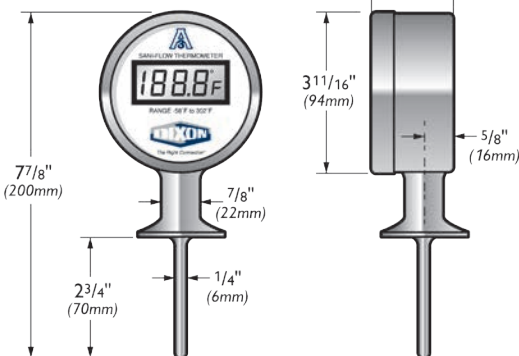

Product not returnable and no cancellations.

Ordering code shown with clamp configuration "U". See ordering information for other types available.

Size	Probe Length ¹	Code
3/4"	2-3/8"	75U
1"	2-5/5"	1U
1-1/2"	2-3/4"	15U
2"	3-1/2"	2U
2-1/2"	3-1/2"	25U
3"	3-3/4"	3U
4"	4-1/2"	4U

¹ Custom probe lengths are available